

Breaking-pin (plastic)



Data sheet

Our products from the division BUILDING SOLUTIONS

SERVICES



- » On-site tests -> we ensure that your requirements are properly covered by our planning.
- » Test reports -> for your safety and documentation.
- » Trainings -> the knowledge of your employees from planning and production is enhanced by our experts on site, online or via webinar.
- » Planning support -> latest design software, planning documents, CAD data and much more can be downloaded any time from www.philipp-group.de.

HIGH DEMANDS ON PRODUCT SAFETY AND PRACTICALITY

- » Close cooperation with notified bodies and - if necessary - approval of our solutions.

TECHNICAL DEPARTMENT

- » Our expert-team will support you at any time during your planning phase with detailed advice.




GENERAL PRODUCT INFORMATION

The Breaking-pins (plastic) are used in order to fix threaded transport anchors and inserts as well as fixing sockets easily, fast and flush to the surface of the formwork.

The Breaking-pin is pressed in a prepared hole of the formwork with already screwed-on anchor (picture 4). Before casting the concrete we recommend to fix the anchor to the reinforcement additionally. The predetermined breaking point of the Breaking-pin enables a fast and easy demoulding (picture 5). Here the part of the pin, which remains in the socket, now protects the thread against dirt until the final use. Then a standard slotted screwdriver is enough to unscrew the pin from the socket. For this purpose, a recess in-sight the pin is provided (picture 6).

The Breaking-pin has particular advantages when used in manholes, panels with openings, garage formworks as well as in formworks with a challenging demoulding.

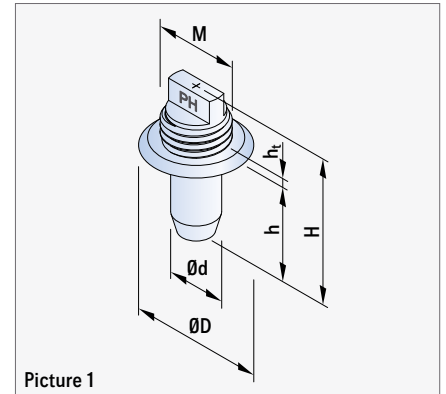


Picture 1



POSSIBLE COMBINATIONS


Only to be combined with Wirbelstar and Lifting loop with threaded end.

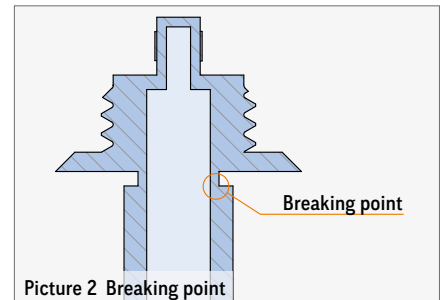


Picture 2 Breaking point

TABLE 1: DIMENSIONS OF THE BREAKING-PIN (PLASTIC)


Ref. no.	Type RD / M	ØD (mm)	Ød (mm)	H (mm)	h (mm)	h _t (mm)
72KHS08	8	19.5	11.3	39.0	23.0	2.0
72KHS10	10	19.5	11.3	39.0	23.0	2.0
72KHS12	12	21.5	11.3	39.0	23.0	2.0
72KHS16	16	25.5	17.3	45.0	23.0	2.0
72KHS20	20	28.0	17.3	45.0	23.0	2.0
72KHS24	24	35.0	17.3	45.0	23.0	2.0

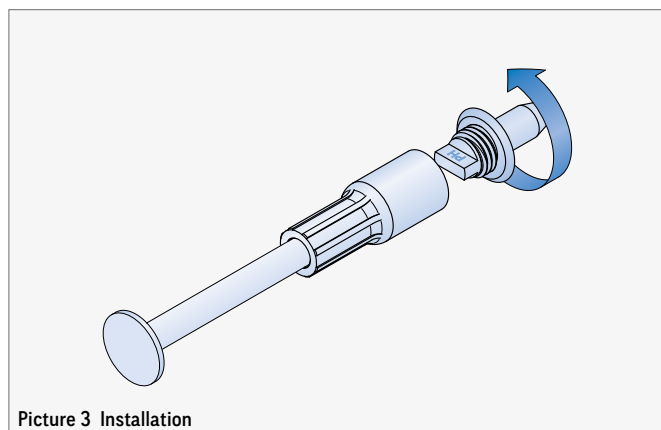


Picture 3 Installation

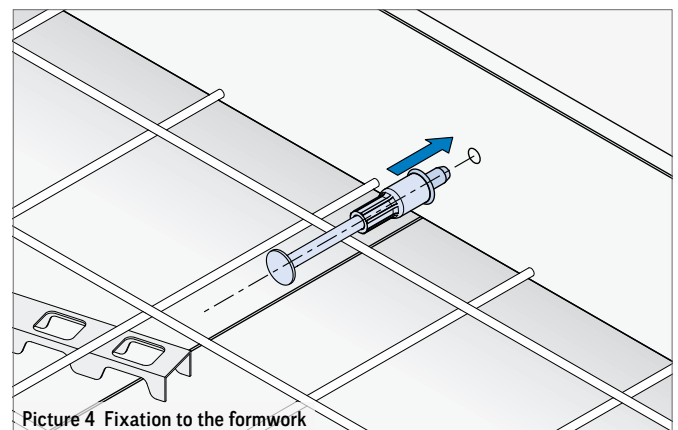

Picture 4 Fixation to the formwork

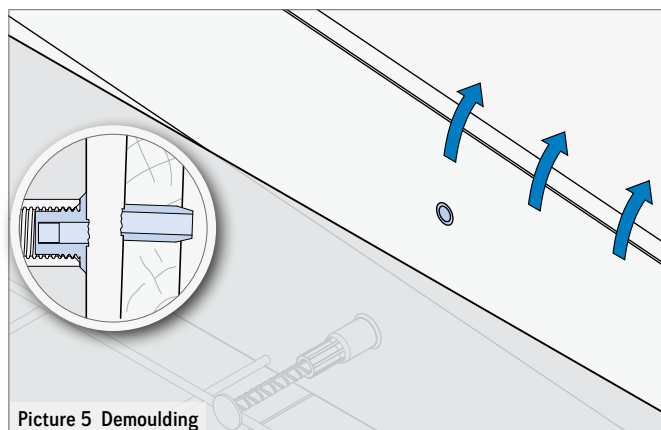

Picture 5 Demoulding

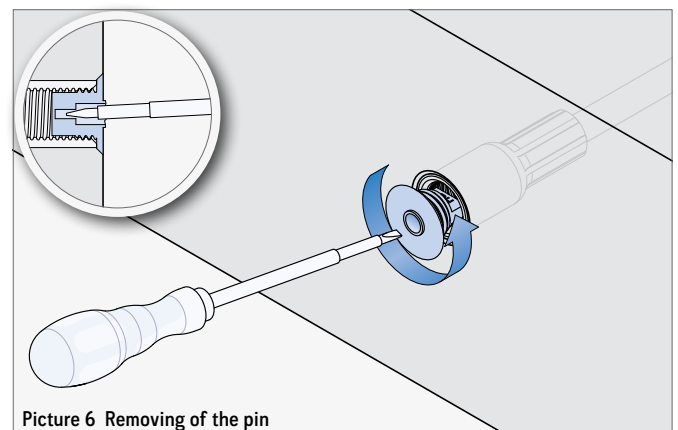

Picture 6 Removing of the pin

HEADQUARTERS

Lilienthalstraße 7-9
63741 Aschaffenburg
☎ +49 6021 40 27-0
✉ info@philipp-gruppe.de

PRODUCTION AND LOGISTICS

Hauptstraße 204
63814 Mainaschaff
☎ +49 6021 40 27-0
✉ info@philipp-gruppe.de

OFFICE COSWIG

Roßblauer Straße 70
06869 Coswig / Anhalt
☎ +49 34903 6 94-0
✉ info@philipp-gruppe.de

OFFICE NEUSS

Sperberweg 37
41468 Neuss
☎ +49 2131 3 59 18-0
✉ info@philipp-gruppe.de

OFFICE TANNHEIM

Robert-Bosch-Weg 12
88459 Tannheim / Allgäu
☎ +49 8395 8 13 35-0
✉ info@philipp-gruppe.de

PHILIPP VERTRIEBS GMBH

Pfaffing 36
5760 Saalfelden / Salzburg
☎ +43 6582 7 04 01
✉ info@philipp-gruppe.at

PHILIPP POLSKA SPÓŁKA Z O.O.

ul. Wojska Polskiego 1
47-220 Kędzierzyn-Koźle / Opole
☎ +48 503 353 816
✉ polska@philipp-gruppe.de



HEADQUARTERS Aschaffenburg



Visit us!

www.philipp-gruppe.com